

# Federazione Italiana Scherma

Viale Tiziano,74 00196 Roma www.federscherma.it

Roma 10 settembre 2018

A TUTTI GLI INTERESSATI

<u>- LORO SEDI -</u>

### COMUNICATO TECNICO N° 1/19

OGGETTO: Revisione requisiti tecnici per maschera da scherma.

Facendo seguito a quanto già disposto con Comunicato Tecnico n° 2 del 03/01/2018 si ricorda che a partire dal <u>1° settembre</u> della corrente stagione agonistica è consentito esclusivamente l'uso di maschere rispondenti ai requisiti tecnici descritti nel documento allegato.

Si invitano pertanto tutti gli interessati a consultare, oltre all'allegato di cui sopra, anche l'ulteriore allegato con l'elenco delle maschere che, ad oggi, soddisfano i nuovi requisiti; tali documenti sono anche reperibili sul sito web della Federazione Internazionale agli indirizzi: <a href="http://static.fie.org/uploads/18/92460-Mask%20technical%20requiremnts2.pdf">http://static.fie.org/uploads/18/92460-Mask%20technical%20requiremnts2.pdf</a>
<a href="http://static.fie.org/uploads/19/98154-ListMaskwith%20new%20fastening2018.076.pdf">http://static.fie.org/uploads/19/98154-ListMaskwith%20new%20fastening2018.076.pdf</a>

Il Segretario Generale
Marco Cannella

Allegati: 2



















Atleticom.it






#### TECHNICAL REQUIREMENT FOR THE SECOND FASTENING SYSTEM OF THE MASK WITH METALLIC TONGUE


- ▶ The central band (strap) should not have a width less than mm 45
- ▶ the strap has to be lowered by 20/25 mm, low enough across the rear of the cervical region that the position of the strap on the head ensures that the mask cannot slide off.
- ▶ the manufacturers can decide to increase the length of the metal tongue to a maximum of 25mm
- ▶ the band has to be in solid material: when stretched the material should not be deformed and should quickly return to its original shape and size.
- ► The fastening system must be doubled: it has to be fastened with a double security system (this means that the Velcro<sup>™</sup> has to be attached at least two times).
- ► The Velcro<sup>™</sup> must bear a minimum breaking strength of 750 N/cm
- ► The tags to wich the strap is attached have to be secured to both sides of the mask with the same breaking strain (picture 8)
- ▶ Mechanical systems are not allowed at the moment
- ▶ Other systems can be used as long as approved by the SEMI Commission

Please see the sequence of pictures below from 1 to 4 (courtesy of some manufacturers)

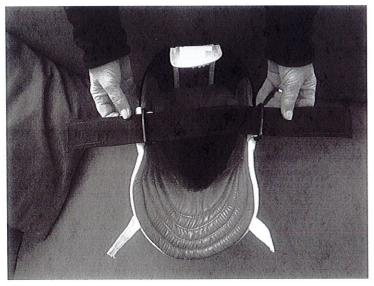

Picture 1




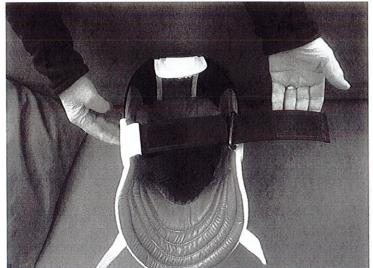

Picture 2



Picture 3

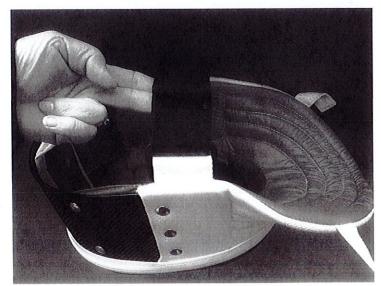

Picture 4



In the following pages you can find some samples of other manufacturers (pictures 6/7/8):

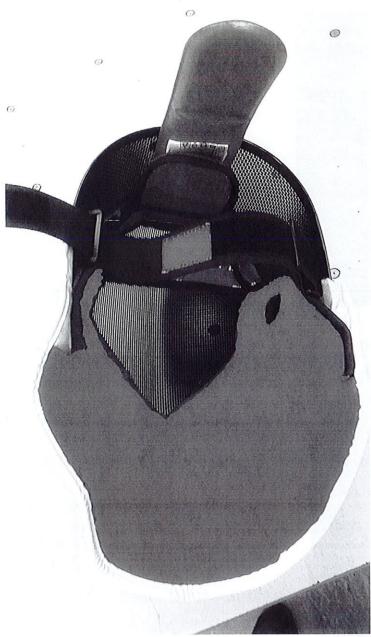


Figura 5





Picture 8


## SPECIAL FEATURES FOR LEON PAUL CONTOUR FIT MASK

- ▶ The position of the main strap must be low enough to ensure that the mask cannot slide off; the correct distance should be decided by the manufacturer (typically 25/30 mm).
- ▶ The strap must incorporate 3 fixing points as shown below (picture 9).
- ▶ The use of the magnetic strap, already existing, remains mandatory.





Picture 9

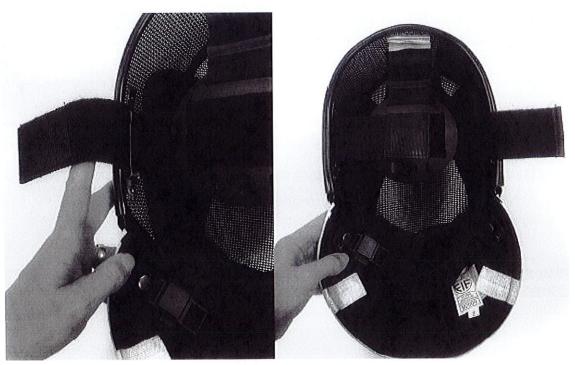

Picture 10



## MASKS WITH NEW FASTENING SYSTEM ALREADY APPROVED BY THE SEMI COMMISSION

(rule m.25.7 + Annex A)

Updated: 9th July 2018

Following the decision off he Comex approved by the next Congress in Doha, see below the list of the masks with new fastening system already approved by the SEMI Commission:

**ABSOLUTE FENCING GEAR (AF)** 

**ALLSTAR** 

**ARTOS** 

**BEYOND FENCING GEAR** 

**BLUE GAUNTLET** 

FWF (both systems: band or with press fasteners)

**GAJARDONI** 

**JIANLI** 

**LEON PAUL (both systems, traditional and contour fit)** 

NEGRINI

PBT (both systems: band or system with press fasteners)

**PRIEUR** 

**UHLMANN** 

**WUXI** 

The list will be updated regularly when others producers will obtain the approval by SEMI.

President of the SEMI

Semen Rikhtman

COMEX's Representative at the SEMI

Jacek Bierkowski

lacel Bierlouchi

SEMI in charge for

Giandomenig